


R84G - Pressure regulators Excelon® Plus Modular System

- > Port size: 3/8" ... 3/4" (ISO G/PTF)
- > Excelon® Plus design allows in-line installation or modular installation with other Excelon® Plus products
- > Push to lock adjusting knob with built in tamper resistant feature
- > Easy to read flush mounted gauge as standard, integrated electronic pressure sensor as option
- > High Corrosion resistance: Metal body with electrophoretic paint finish
- > Relieving and Non-relieving options
- >  DoC in accordance with 2014/34/EU/ATEX



Technical features pressure regulator

Medium:

Compressed air only

Maximum supply pressure:

20 bar (290 psi)

Outlet pressure ranges:

0,3 ... 10 bar (4 ... 145 psi),
0,3 ... 4 bar (4 ... 58 psi) optional,
0,3 ... 7 bar (4 ... 101 psi) optional,
0,7 ... 17 bar (10 ... 247 psi) optional

Gauge:

Integrated as standard
Gauge port 1/8 or electronic pressure sensor as option

Port size:

G3/8, G1/2, G3/4,
3/8 PTF, 1/2 PTF, 3/4 PTF

Diaphragm Type:

Relieving and Non-relieving

Flow:

125 dm³/s at port size: 1/2",
inlet pressure 10 bar (145 psi),
6,3 bar (91 psi) set pressure and
a Δp: 1 bar (14,5 psi) droop from set.

Ambient/Media temperature:

-20 ... +65°C (-4 ... +149°F)
Air supply must be dry enough to avoid ice formation at temperatures below +2°C (+35°F).

Atex:

Regulators R84 are in conformity with ATEX 2014/34/EU

 II 2 GD

Ex h IIC T6 Gb


EX h IIIC T85°C Db

excluding all versions with electronic pressure sensor

Materials:

Body: Die cast aluminium
Body covers: ABS
Bonnet: POM/Aluminium
Valve: PP with Geolast seals
Elastomers: NBR

Technical data R84G - standard models with integrated flush mounted gauge

Symbol	Port size	Pressure range (bar)	Adjustment	Integrated gauge (bar)	Weight (kg)	Model*)
	G3/8	0,3 ... 10	Knob	0 ... 10	0,59	R84G-3GK-RMG
	G1/2	0,3 ... 10	Knob	0 ... 10	0,59	R84G-4GK-RMG
	G3/4	0,3 ... 10	Knob	0 ... 10	0,59	R84G-6GK-RMG

*) All models shown here are supplied with integrated gauge applicable for flow direction left to right.

With flow direction right to left please use the online configurator www.norgren.com/air-preparation-configurator or contact Norgren

R84G - Pressure regulators with integrated electronic pressure sensor

- > Electronic monitoring of secondary pressure
- > 1.44" full colour graphic display. Excellent Visual Management.
- > Parameter Adjustment via front screen Buttons or Accessed Via IO-Link
- > Configurable switching output
- > Adjustable settings:
 - Setpoint,
 - Tolerance,
 - Hysteresis,
 - Pressure Units,
 - Temperature Units,
 - Screen Orientation,
 - Digital Output Type (NPN, PNP, Push-Pull),
 - Digital Output State (Normally High, Normally Low)
- > Install as a standard electronic pressure sensor or a pressure transducer with IO-Link




Technical features electronic pressure sensor

Electrical parameters

Secondary pressure measurement range:

0 ... 10 bar
(0 ... 145 psi, 0 ... 1.0 MPa)

Repeatability:

≤ 0.1% of full scale (FS) at stable temperature

Accuracy:

≤ 1.5% of full scale (FS) of detected pressure (0 ... +50°C, +32 ... +122°F)

Units:

Pressure: bar, psi, MPa
Temperature: °C, °F
Voltage: V

Display:

1.44" full colour TFT LCD
Text / background colours:
white/green: pressure in range
white/red: pressure out of range
white/amber: error
black white: setting mode

Display fields:

User configurable identifier, pressure value, pressure units, user configurable message, menu

IO-Link function:

Pressure information
Pressure out of range warnings
Temperature diagnostic
Supply voltage diagnostic
Operating time diagnostic


Min. cycle time:

20 ms

For product IODD file please use the online link <http://s.norgren.com/digital-gauge-iodd>

for a copy of the Quick Start Guide or comprehensive Operators manual please use the following online link www.norgren.com/excelon-plus

Electrical connection M8 x 1

	Pin-No.	Signal	Cable
	1	L+ (24V)	brown
	2	Out 2 (switching)	white
	3	L- (0V)	blue
	4	C/Q (IO-Link)	black

Electrical connection:

M8 x 1

Power supply:

18 ... 30 V d.c.

Current consumption:

20 mA

Electromagnetic compatibility:

According to EN 61000-6-2;
EN 61000-6-3


Switching output:

Configurable NPN / PNP / Push-Pull / NO / NC / hi-Z

Load current:

100mA with short circuit protection

Technical data R84G - standard models

Symbol	Port size	Pressure range (bar)	Adjustment	Integrated gauge (bar)	Weight (kg)	Model*)
	G3/8	0,3 ... 10	Knob	0 ... 10	0,79	R84G-3GK-RME
	G1/2	0,3 ... 10	Knob	0 ... 10	0,79	R84G-4GK-RME
	G3/4	0,3 ... 10	Knob	0 ... 10	0,79	R84G-6GK-RME

*) All models shown here are supplied with integrated pressure sensor applicable for flow direction left to right.

With flow direction right to left please use the online configurator www.norgren.com/air-preparation-configurator or contact Norgren

Option selector *1)

Port size	Substitute
3/8"	3
1/2"	4
3/4"	6
Thread form	Substitute
PTF	A
ISO G parallel (standard)	G
Adjustment	Substitute
Knob (standard)	K
T-bar	T*2)

R84G-★★★★-★★★★

Gauge	Substitute
With integrated digital pressure sensor *3)	E
With (fitted integrated gauge)	G
Without integrated gauge but with gauge port 1/8"	N
Pressure range *4)	Substitute
0,3 ... 4 bar	F
0,3 ... 7 bar	K
0,3 ... 10 bar (standard)	M
0,7 ... 17 bar	S*2)
Diaphragm Type	Substitute
Relieving	R
Non-relieving	N

*1) All models shown here are applicable for flow direction left to right.

With flow direction right to left please use the online configurator www.norgren.com/air-preparation-configurator or contact Norgren

*2) Units with 17 bar outlet pressure range are available only with the T-bar adjustment. Not available in connection with integrated pressure sensor.

*3) Only available with 10 or 4 bar pressure range

*4) Outlet pressure can be adjusted to pressures in excess of, and less than, those specified. Do not use these units to control pressures outside of the specified ranges.

Excelon Plus adheres to the following harmonised standard and technical specifications:

2014/34/EU Equipment and protective systems intended for use in potentially explosive atmospheres.

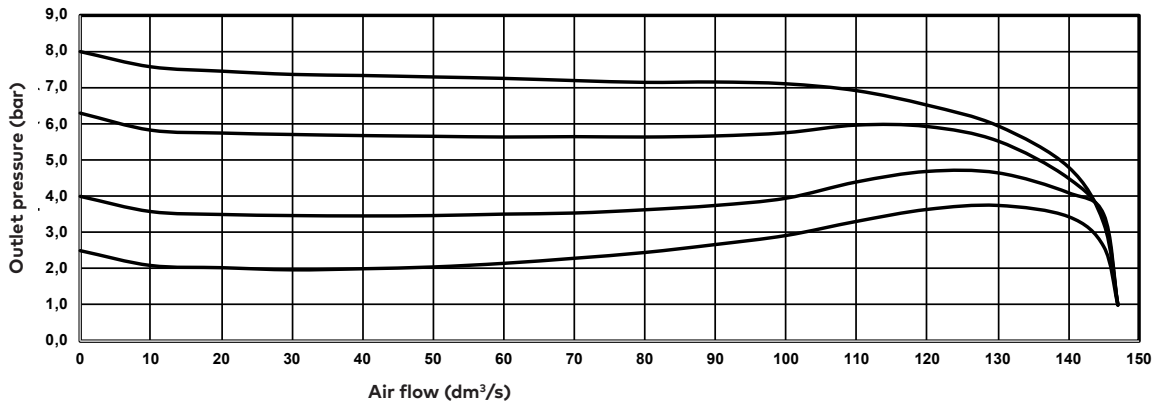
The following harmonised standards and technical specifications have been applied ISO 4414:2010 – Pneumatic fluid power – General rules and safety requirements for systems and their components; ISO 80079-36:2016 – Explosive atmospheres – Part 36: Non-electrical equipment for explosive atmospheres – Basic method and requirements; ISO 80079-37:2016 – Explosive atmospheres Part 37: Non-electrical equipment for explosive atmospheres – Non-electrical type of protection constructional safety "c", control of ignition sources "b", liquid immersion "k".


II 2 GD
Ex h IIC T6 Gb
Ex h IIIC T85°C Db
ATEX Certification No.: NORGREN 18.0001X

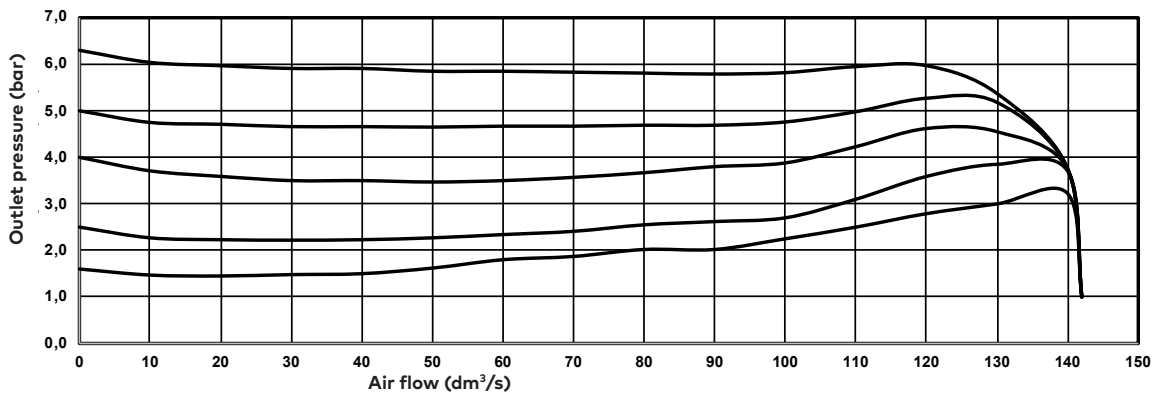
For a copy of the Declaration of Conformity (DoC) please use the link http://cdn.norgren.com/pdf/IM_Excelon_Plus_EN_final.pdf

Flow characteristics

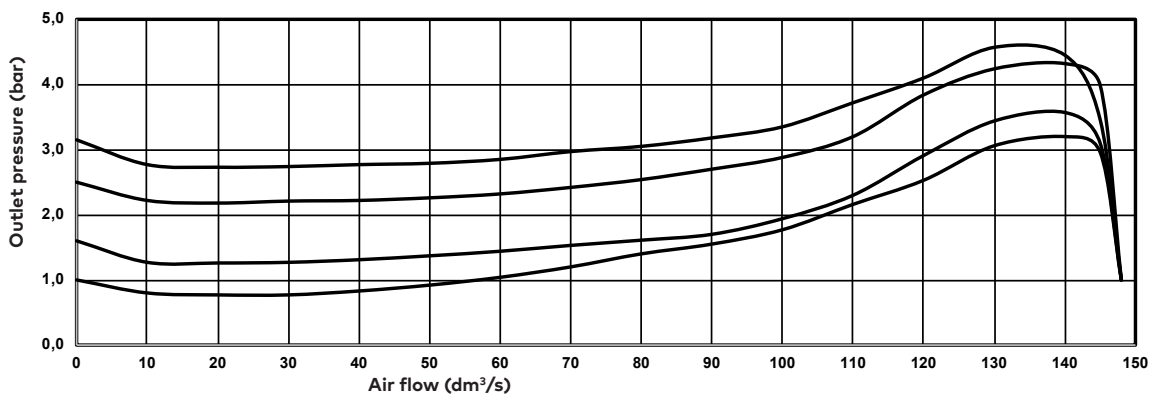
Inlet pressure: 10 bar (145 psi),
 Outlet pressure range: 0,3 ... 10 bar (4 ... 145 psi)
 Port size: 1/2"



Inlet pressure: 10 bar (145 psi),
 Outlet pressure range: 0,3 ... 7 bar (4 ... 101 psi)
 Port size: 1/2"



Inlet pressure: 10 bar (145 psi),
 Outlet pressure range: 0,3 ... 4 bar (4 ... 58 psi)
 Port size: 1/2"



Accessories
Quikclamp®

Page 9

840014-51KIT

Quikclamp® with bracket assembled

Page 9

840014-52KIT

Hybrid Quikclamp® *1

Page 9

840014-61

Hybrid Quikclamp® with bracket assembled *1

Page 9

840014-62

*1) To connect new Excelon Plus to old Excelon 74/73 units. Having the same hole centres as 74 series mounting bracket. A Quikclamp adds 13.6 mm to the overall width of a combination unit

Neck mounting bracket and plastic panel nut

Page 9

840068-51KIT

Plastic panel mounting nut

Page 9

840048-89KIT

Neck mounting bracket and metal panel nut

Page 9

840068-50KIT

Metal panel mounting nut

Page 9

840048-01KIT

Mounting bracket

Page 10

840024-50KIT

Integrated gauge 10 bar gauge


840073-01KIT

Integrated gauge 20 bar gauge


840073-02KIT

Gauge adaptor kit 1/8 PTF


840100-01KIT

Gauge adaptor kit R 1/8


840100-02KIT

Full flow porting block horizontal, 3/4" PTF

Page 10

840028-50KIT

Full flow porting block horizontal, G3/4"

Page 10

840028-53KIT

Full flow porting block vertical, 3/4" PTF

Page 10

840028-68KIT

Full flow porting block vertical, G3/4"

Page 10

840028-69KIT

Pressure switch interface block (18D pressure switch) G1/4

Page 10

0337717000000000

Pressure sensing block 1/4 PTF


Page 10

840016-50KIT

Pressure sensing block G1/4

Page 10

840016-51KIT

Port Adaptors

Page 10

1/4 PTF	840015-01KIT
3/8 PTF	840015-02KIT
1/2 PTF	840015-03KIT
3/4 PTF	840015-04KIT
G1/4	840015-09KIT
G3/8	840015-10KIT
G1/2	840015-11KIT
G3/4	840015-12KIT

Padlock


840055-01KIT

Lockout device


840055-02KIT

**Pressure switch 18D
(0,5 ... 8bar) *1**

Page 11

0881300

**Digital pressure switch
51D (-1 ... 10 bar) *2**

Page 11

0860810

**Electronic Pressure Sensor
– stand alone version *3**


Q84G

IO-Link cables
Connection cable M8x1 for integrated electronic pressure sensor


Description	Cable length (m)	Model
M8 female to M12 male	0,6	NC-084FS-124MS-A
	1,0	NC-084FS-124MS-1
	2,0	NC-084FS-124MS-2
M8 female to free end	5,0	NC-084FS-124MS-5
	5,0	NC-084FS-00000-5

- *1) Flanged version. For other pressure ranges, please see data sheet 5.11.001
 *2) For other pressure ranges, please see data sheet 5.11.385
 *3) Q84G stand alone electronic pressure sensor module
 see <http://s.norgren.com/digital-gauge-iodd> for data-sheet 8.900.905.

Gauges

(For regulators with gauge port instead of integrated port)

**Center back connection, white face
(for full technical specification see datasheet 8.900.900)**


Pressure range (bar)*3)	(MPa)	(psi)	∅	Thread size	Model
0 ... 6	0 ... 0,6	0 ... 84	50 mm	R1/8	18-015-012
0 ... 10	0 ... 1	0 ... 145	50 mm	R1/8	18-015-013
0 ... 25	0 ... 2,5	0 ... 362	50 mm	R1/8	18-015-014

*3) primary scale

**R84 / B84
Elastomer kit,
relieving**


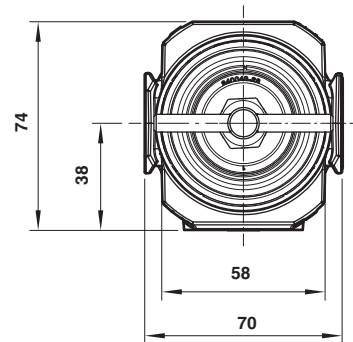

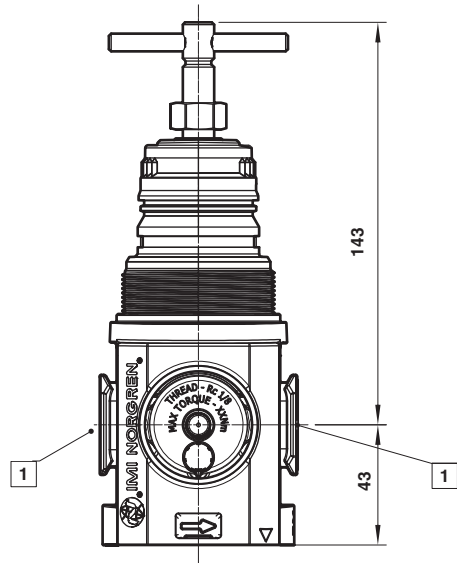
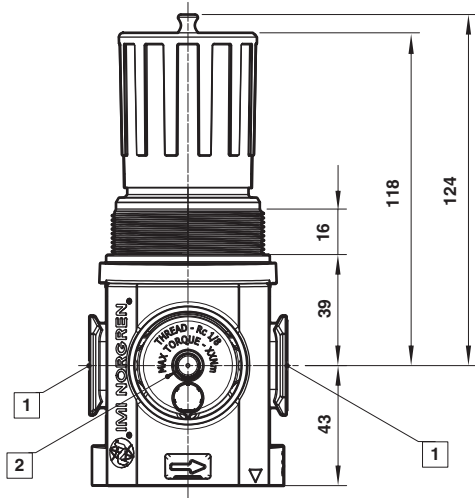

FRLB84-KIT

**R84 / B84
Elastomer kit,
Non-relieving**


FRLB84NR-KIT

Dimensions

Dimensions in mm
Projection/First angle

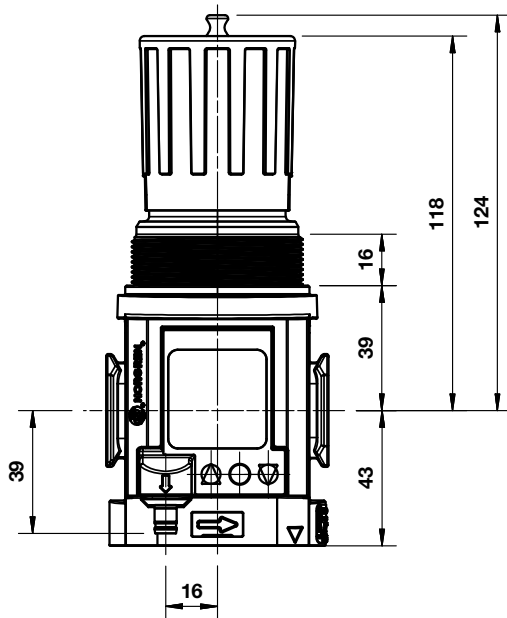
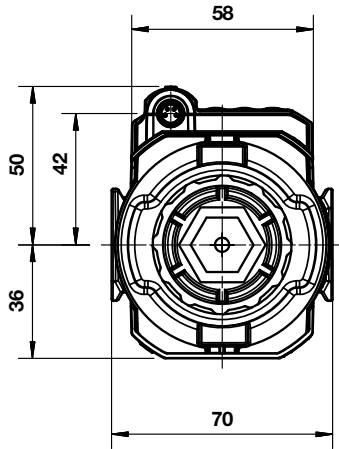


- 1 Main ports 3/8", 1/2" or 3/4"
(ISO G/PTF)
- 2 Gauge Port Rc 1/8 for ISO G and
1/8 PTF for PTF main ports

Dimensions

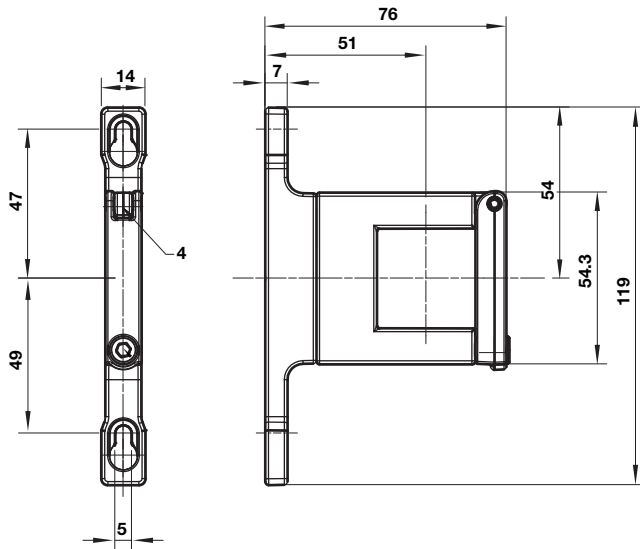
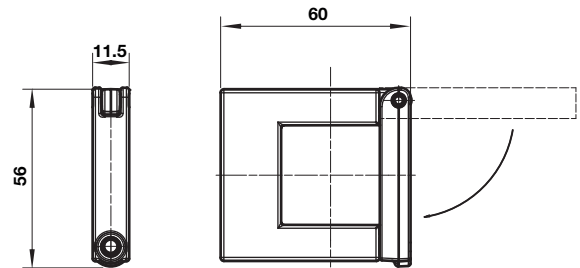
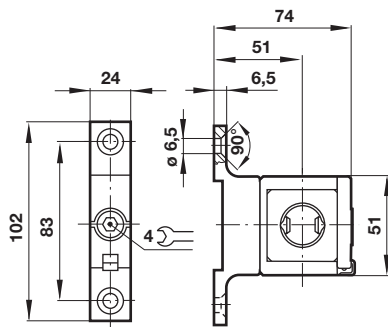
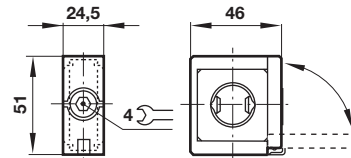

**R84G-
General Purpose Regulator**

Dimensions in mm
Projection/First angle

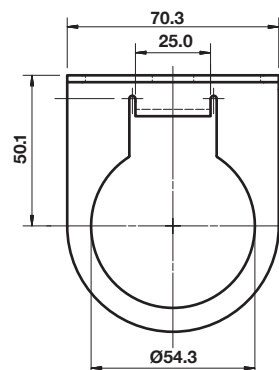



Accessories

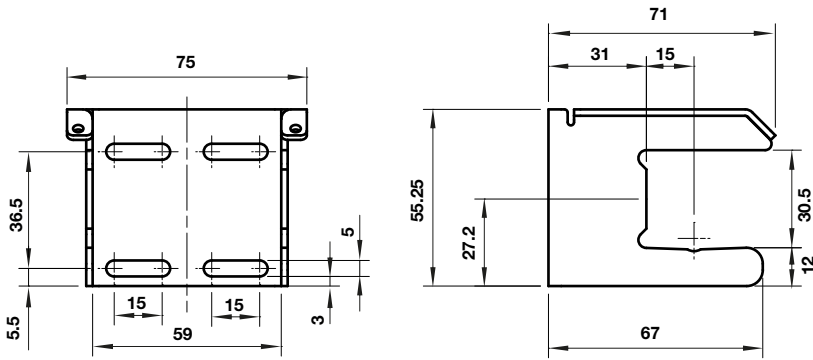

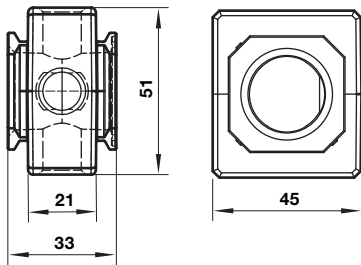

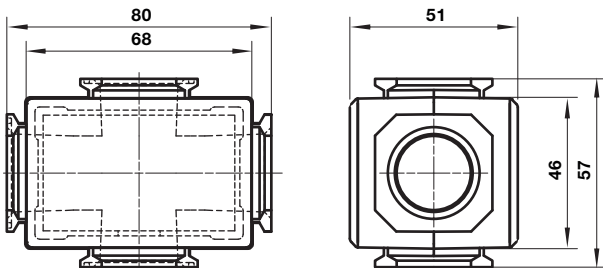



 Dimensions in mm
 Projection/First angle

Quikclamp® with wall bracket

Quikclamp®

Hybrid-Quikclamp® with wall bracket

Hybrid-Quikclamp®

Panel mounting nut


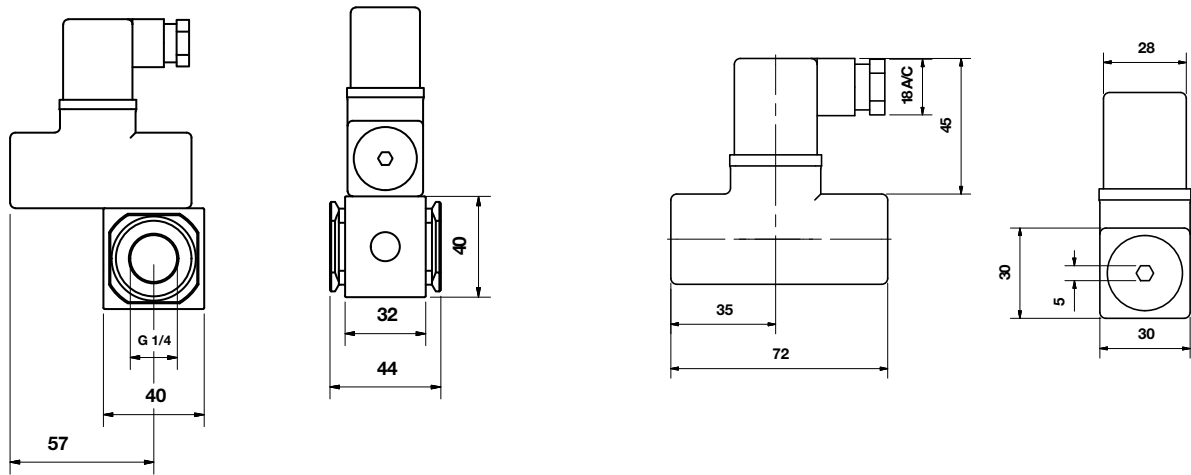
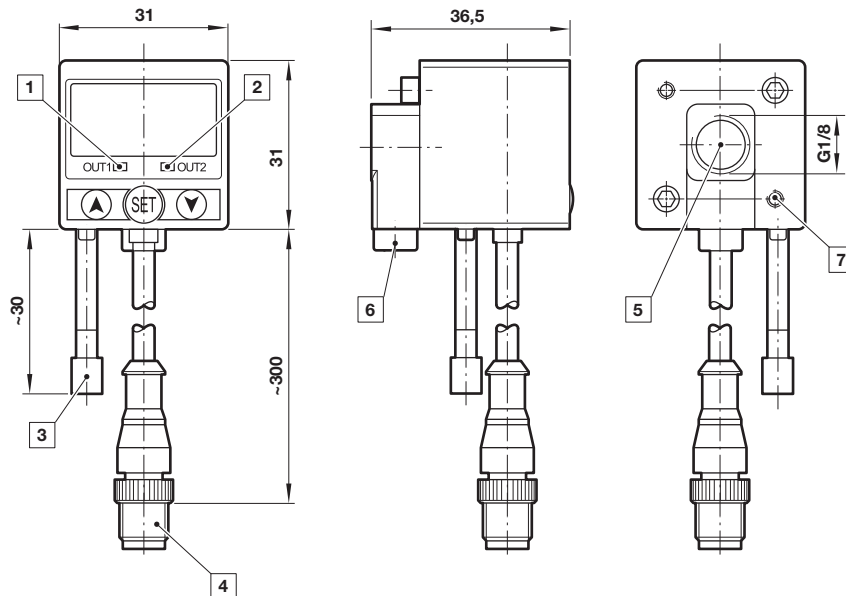
Recommended panel hole size:
 ø 55 mm ... 57 mm
 Panel thickness:
 2 ... 6 mm

Neck mounting bracket


Mounting bracket

 Dimensions in mm
 Projection/First angle

Pressure sensing block
Pipe adaptor

Full flow porting block horizontal
Full flow porting block vertical

Porting block for 18D pressure switch


**18D Porting block and
18D assembled**
18D Pressure switch

 Dimensions in mm
Projection/First angle

51D Pressure switch - digital


- 1 Switch OUT 1, green LED
- 2 Switch OUT 2, red LED
- 3 Dustproof protector
- 4 Connector M12 x 1
- 5 Inlet port
- 6 Alternative inlet port G1/8 plugged
- 7 Thread for mounting screw

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under »**Technical features/data**«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult IMI Precision Engineering, Norgren Ltd.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes. The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.